



# SUB-D contacts


## Machined socket contacts

Item number: SUMCS24-28AU1

Packing unit: 100

### Mechanical properties contacts

Contact type:	Socket
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	Gold plated, 1.3µm over 2.0µm Ni
Wire section (mm <sup>2</sup> ):	0.08 - 0.20
Wire section (AWG):	28 - 24

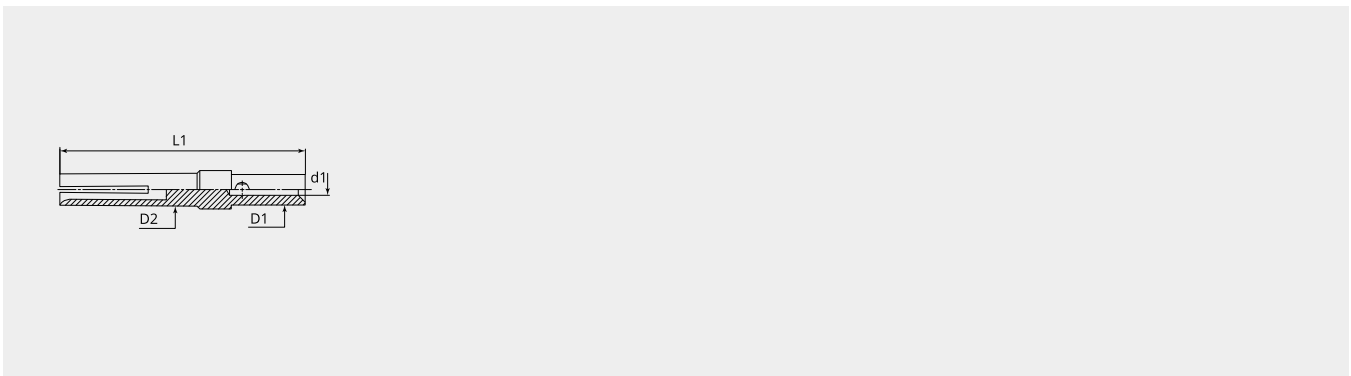

### Dimensional drawing

D1 (Ø):	1.7
D2 (Ø):	1.8
d1 (Ø):	0.6
L1 (mm):	13.6