



SUB-D contacts


Machined socket contacts

Item number: SUMCS24-28AU1-S

Packing unit: 100

Mechanical properties contacts

Contact type:	Socket
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	Gold plated, 1.3µm over 2.0µm Ni
Wire section (mm ²):	0.08 - 0.20
Wire section (AWG):	28 - 24

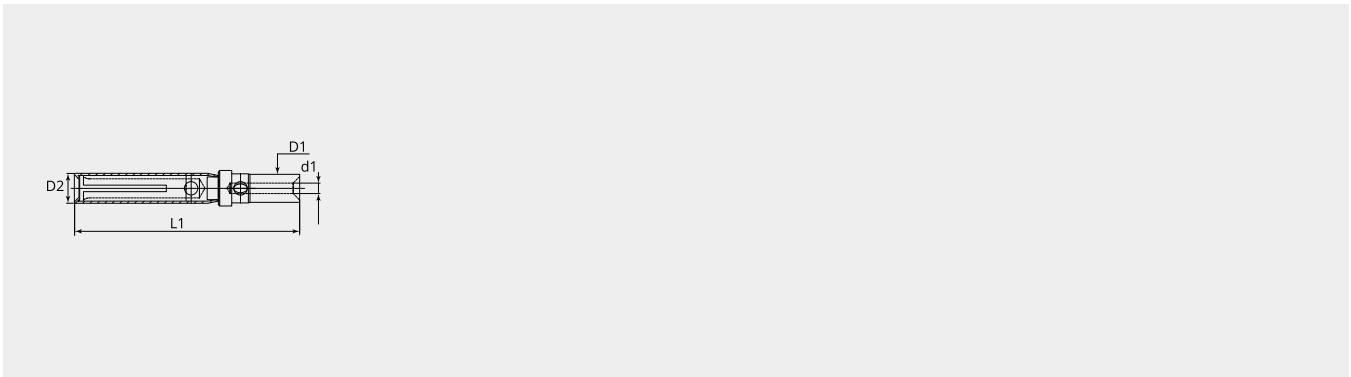

Dimensional drawing

D1 (Ø):	1.7
D2 (Ø):	1.8
d1 (Ø):	0.63
L1 (mm):	13.8