



# Contacts


Pin contact HC series, 200A, 70mm<sup>2</sup>

Item number: GMRC-PHC-70AG

Packing unit: 1

## Mechanical properties contacts

|                                  |               |
|----------------------------------|---------------|
| Contact type:                    | Pin           |
| Strand/wire adaptation:          | Crimp         |
| Number of mating cycles (min.):  | 500           |
| Contact Material:                | CU alloy      |
| Protective layer:                | silver plated |
| Wire section (mm <sup>2</sup> ): | 70            |
| Stripping length (mm):           | 22.5          |
| Max. Cable insulation Ø (mm):    | 18            |

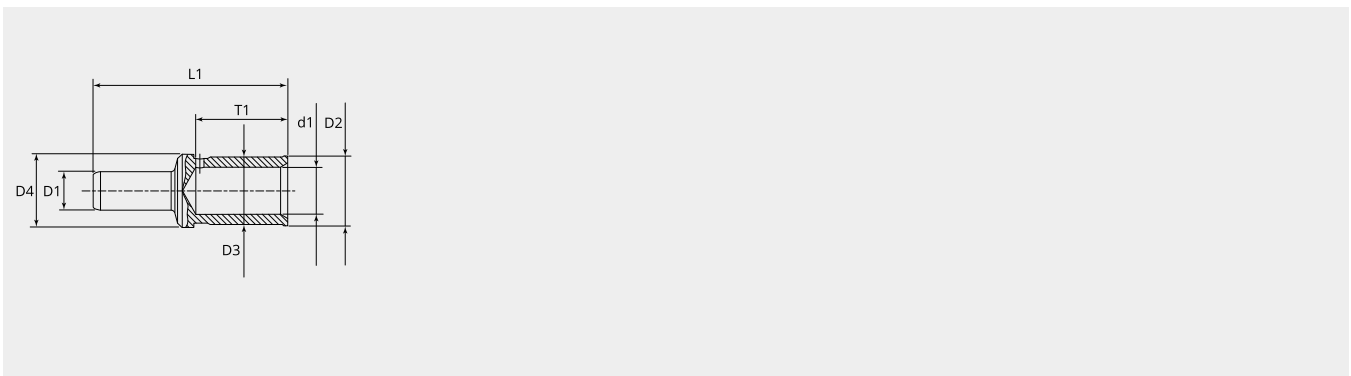

## Dimensional drawing

|          |      |
|----------|------|
| D1 (Ø):  | 9.5  |
| D2 (Ø):  | 17.0 |
| D4 (Ø):  | 18.0 |
| d1 (Ø):  | 11.5 |
| L1 (mm): | 47.7 |
| T1 (mm): | 22.5 |

## Electrical properties contacts

|                      |     |
|----------------------|-----|
| Nominal current (A): | 200 |
|----------------------|-----|

