



# Contacts


Pin contact HC series, 200A, 70mm<sup>2</sup>

Item number: GMRC-PHC-70AG

Packing unit: 1

## Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	silver plated
Wire section (mm <sup>2</sup> ):	70
Stripping length (mm):	22.5
Max. Cable insulation Ø (mm):	18

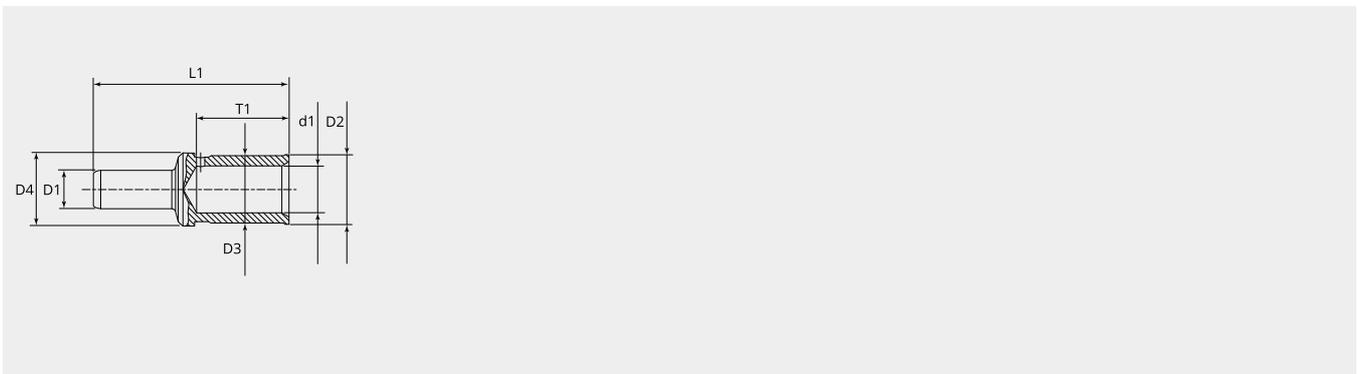

## Dimensional drawing

D1 (Ø):	9.5
D2 (Ø):	17.0
D4 (Ø):	18.0
d1 (Ø):	11.5
L1 (mm):	47.7
T1 (mm):	22.5

## Electrical properties contacts

Nominal current (A):	200
----------------------	-----



## Complementary products:

### Tools:



#### **B500ND**

Hydraulic battery crimper B500ND - 18V



#### **HT51**

Hydraulic press tool HT51 50kN



#### **MK-16-50**

Hexagonal crimping dies for 50kN crimping tools, MK-16-50