



# Contacts


Pin contact K70C series, 70A, 6mm<sup>2</sup>

Item number: GMRC-PK70C-6AG

Packing unit: 5

## Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	silver plated
Wire section (mm <sup>2</sup> ):	6
Stripping length (mm):	15.5
Max. Cable insulation Ø (mm):	11

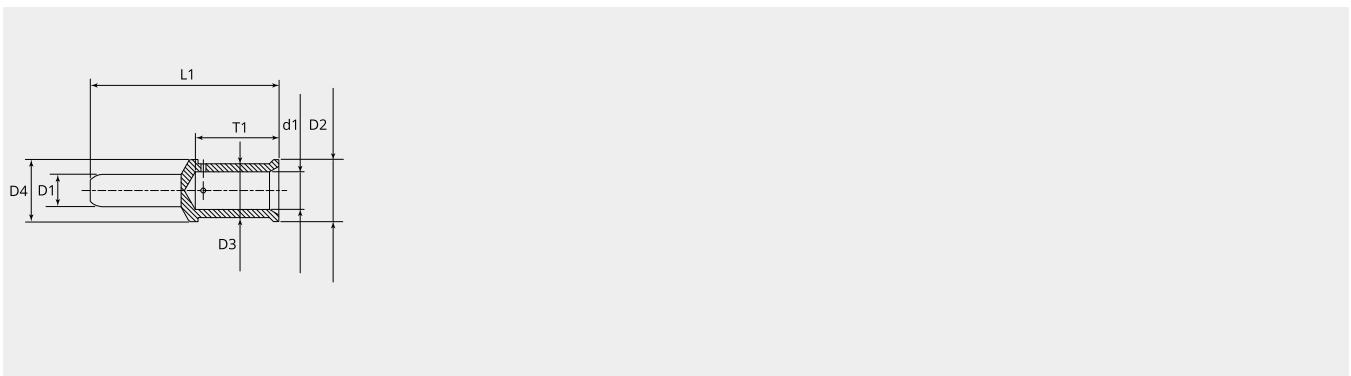

## Dimensional drawing

D1 (Ø):	6.0
D2 (Ø):	11.5
D3 (Ø):	5.0
d1 (Ø):	3.5
L1 (mm):	35.0
T1 (mm):	15.5

## Electrical properties contacts

Nominal current (A):	70
----------------------	----

