



# Contacts


Pin contact K70C series, 70A, 6mm<sup>2</sup>

Item number: GMRC-PK70C-6AG

Packing unit: 5

## Mechanical properties contacts

|                                  |               |
|----------------------------------|---------------|
| Contact type:                    | Pin           |
| Strand/wire adaptation:          | Crimp         |
| Number of mating cycles (min.):  | 500           |
| Contact Material:                | CU alloy      |
| Protective layer:                | silver plated |
| Wire section (mm <sup>2</sup> ): | 6             |
| Stripping length (mm):           | 15.5          |
| Max. Cable insulation Ø (mm):    | 11            |

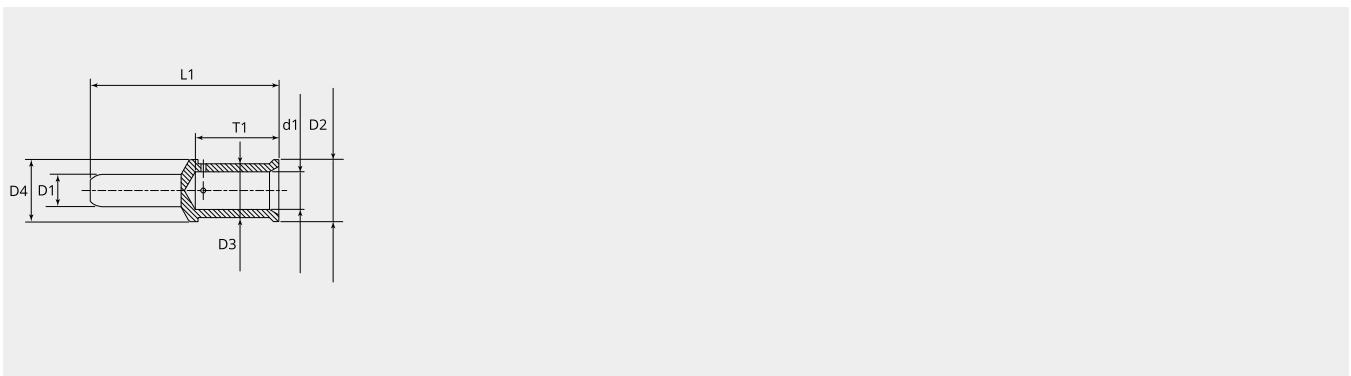

## Dimensional drawing

|          |      |
|----------|------|
| D1 (Ø):  | 6.0  |
| D2 (Ø):  | 11.5 |
| D3 (Ø):  | 5.0  |
| d1 (Ø):  | 3.5  |
| L1 (mm): | 35.0 |
| T1 (mm): | 15.5 |

## Electrical properties contacts

|                      |    |
|----------------------|----|
| Nominal current (A): | 70 |
|----------------------|----|

