



Contacts


Pin contact KC series, 100A, 25mm²

Item number: GMRC-PKC-25AG

Packing unit: 5

Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	silver plated
Wire section (mm ²):	25
Stripping length (mm):	19

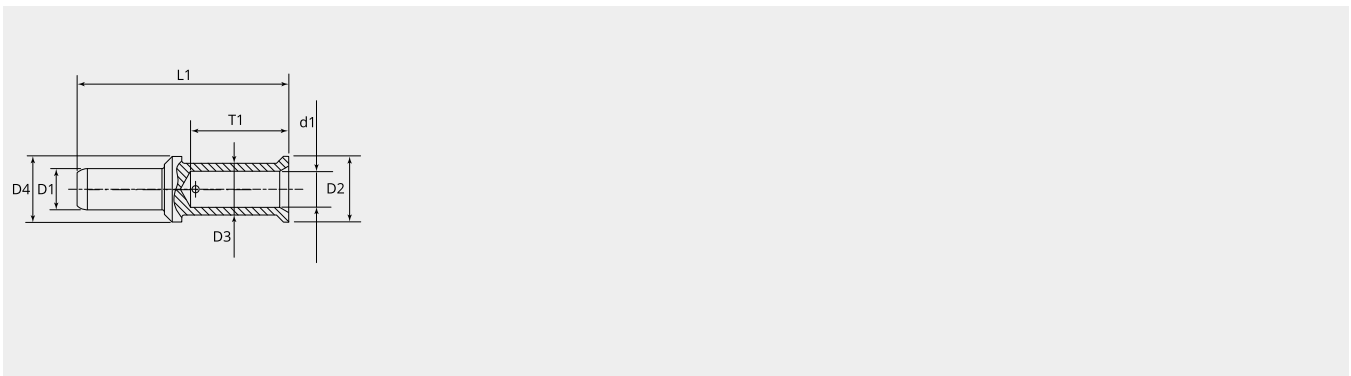

Dimensional drawing

D1 (Ø):	8.0
D2 (Ø):	12.7
D3 (Ø):	10.0
D4 (Ø):	12.7
d1 (Ø):	7.0
L1 (mm):	41.0
T1 (mm):	19.0

Electrical properties contacts

Nominal current (A):	100
----------------------	-----



Complementary products:

Tools:



B500ND

Hydraulic battery crimper B500ND - 18V



HT51

Hydraulic press tool HT51 50kN



MK-10-50

Hexagonal crimping dies for 50kN crimping tools, MK-10-50