



# Contacts


Pin contact KC series, 100A, 35mm<sup>2</sup>

Item number: GMRC-PKC-35AG

Packing unit: 5

## Mechanical properties contacts

Contact type:	Pin
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	silver plated
Wire section (mm <sup>2</sup> ):	35
Stripping length (mm):	16

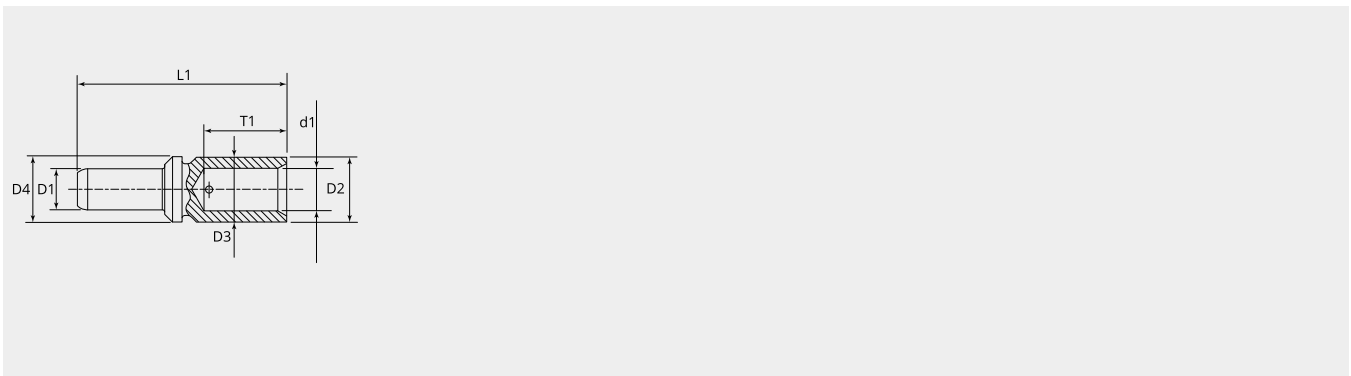

## Dimensional drawing

D1 (Ø):	8.0
D2 (Ø):	12.5
D3 (Ø):	10
D4 (Ø):	12.7
d1 (Ø):	8.2
L1 (mm):	40.5
T1 (mm):	16.0

## Electrical properties contacts

Nominal current (A):	100
----------------------	-----



## Complementary products:

### Tools:



#### **B500ND**

Hydraulic battery crimper B500ND - 18V



#### **HT51**

Hydraulic press tool HT51 50kN



#### **MK-12-50**

Hexagonal crimping dies for 50kN crimping tools, MK-12-50