

# Contacts


Socket contact HC series, 200A, 70mm<sup>2</sup>

Item number: GMRC-SHC-70AG

Packing unit: 1

## Mechanical properties contacts

Contact type:	Socket
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	silver plated
Wire section (mm <sup>2</sup> ):	70
Stripping length (mm):	22.5
Max. Cable insulation Ø (mm):	18

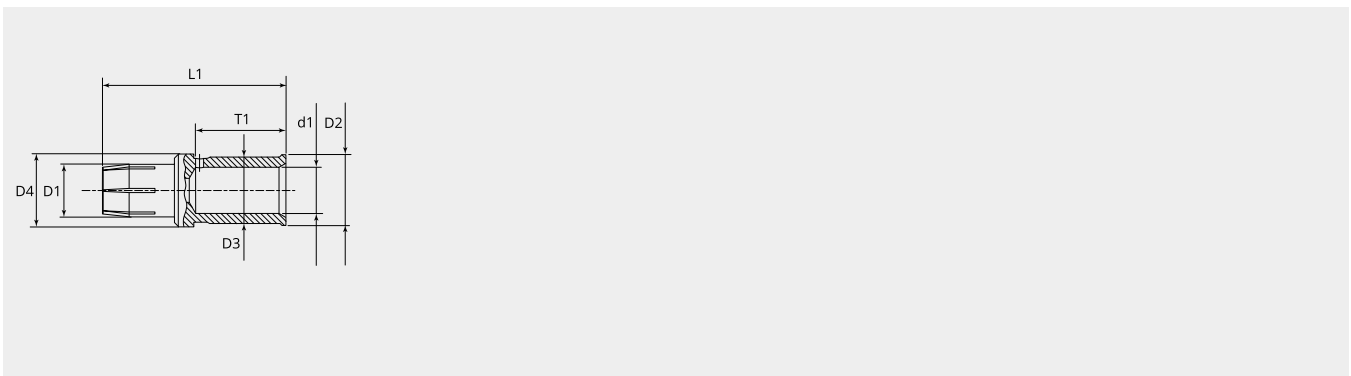

## Dimensional drawing

D1 (Ø):	13.0
D2 (Ø):	17.5
D4 (Ø):	18.0
d1 (Ø):	11.5
L1 (mm):	45.6
T1 (mm):	22.5

## Electrical properties contacts

Nominal current (A):	200
----------------------	-----

