



# Contacts


Socket contact K70C series, 70A, 10mm<sup>2</sup>

Item number: GMRC-SK70C-10AG

Packing unit: 5

## Mechanical properties contacts

Contact type:	Socket
Strand/wire adaptation:	Crimp
Number of mating cycles (min.):	500
Contact Material:	CU alloy
Protective layer:	silver plated
Wire section (mm <sup>2</sup> ):	10
Stripping length (mm):	15.5
Max. Cable insulation Ø (mm):	11

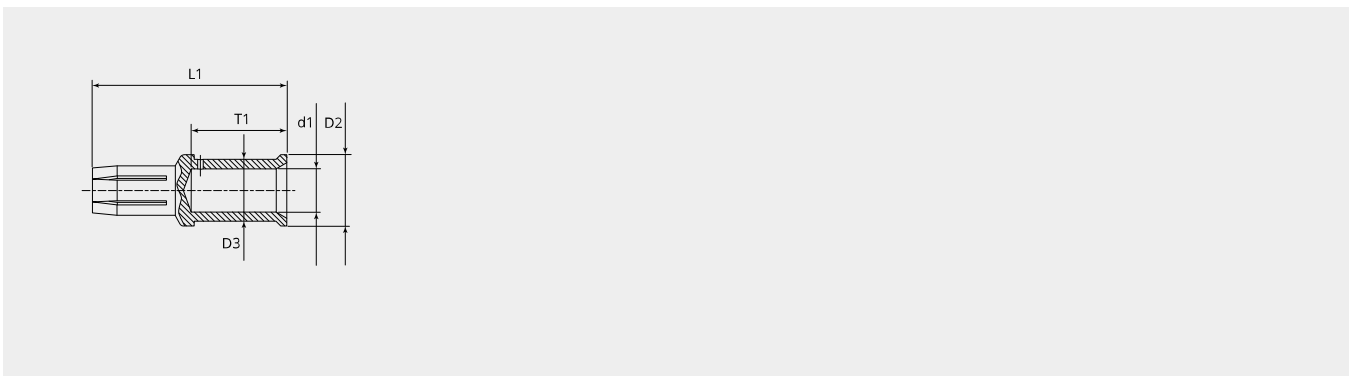

## Dimensional drawing

D2 (Ø):	11.5
D3 (Ø):	5.6
d1 (Ø):	4.3
L1 (mm):	31.5
T1 (mm):	15.5

## Electrical properties contacts

Nominal current (A):	70
----------------------	----

