



Contacts


Socket contact K70C series, 70A, 10mm²

Item number: GMRC-SK70C-6AG

Packing unit: 5

Mechanical properties contacts

| | |
|----------------------------------|---------------|
| Contact type: | Socket |
| Strand/wire adaptation: | Crimp |
| Number of mating cycles (min.): | 500 |
| Contact Material: | CU alloy |
| Protective layer: | silver plated |
| Wire section (mm ²): | 6 |
| Stripping length (mm): | 15.5 |
| Max. Cable insulation Ø (mm): | 11 |

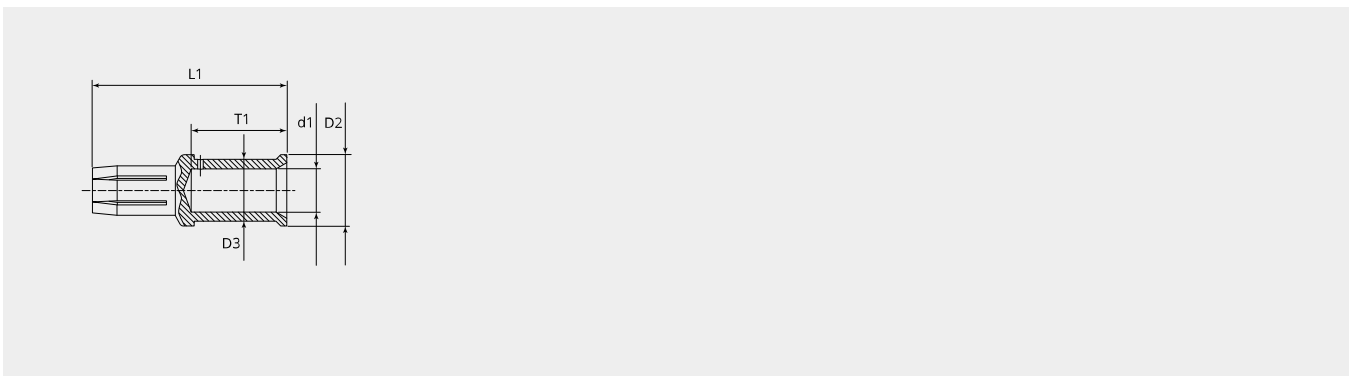

Dimensional drawing

| | |
|----------|------|
| D2 (Ø): | 11.5 |
| D3 (Ø): | 5.0 |
| d1 (Ø): | 3.5 |
| L1 (mm): | 31.5 |
| T1 (mm): | 15.5 |

Electrical properties contacts

| | |
|----------------------|----|
| Nominal current (A): | 70 |
|----------------------|----|

