



Bulkhead mounted housing, size 24 B


Insert mounted from the front

Item number: GMRH-24BS-BK-IF

Packing unit: 1


Technical characteristics

Number of slots:	6 modules
Shell material:	Aluminium die-cast
Surface treatment:	Powder-coated
Surface colour:	RAL 9005 (jet black)
Locking mode:	Screw locking
Operation temperature:	-40°C - +125°C
Material sealing ring:	Nitrile Butadiene Rubber (NBR)
Number of slots:	6 modules
Ground connection:	Yes
REACH compliant:	SVHC substances, yes - Lead
ROHS compliant:	Compliant acc. to 2015/863/EU (RoHS II), Annex II

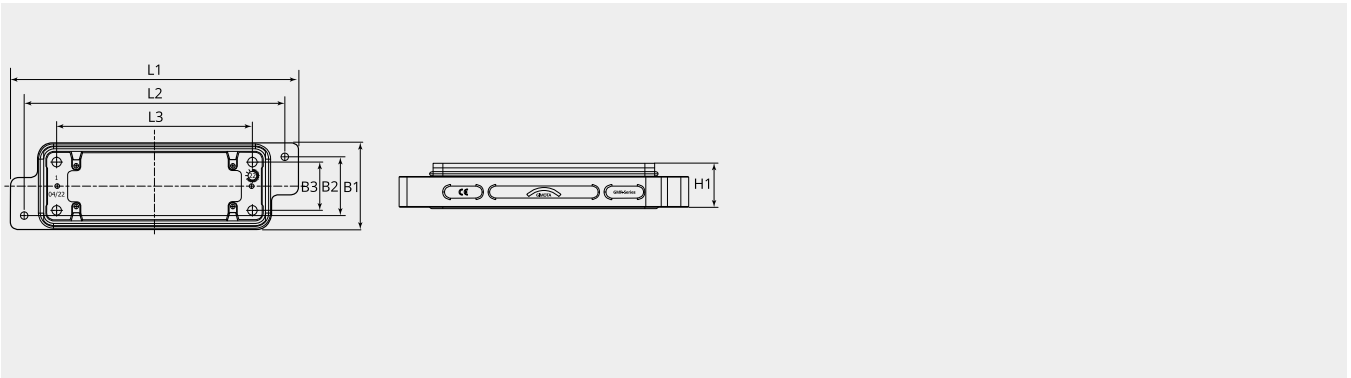

Dimensional drawing

B3:	32
B1 (mm):	58
B2 (mm):	39
H1 (mm):	29
L1 (mm):	192
L2 (mm):	173
L3 (mm):	130

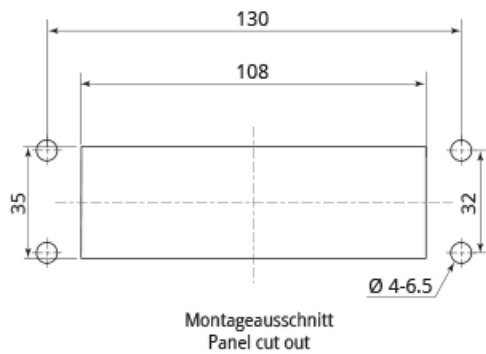

Complementary products:

Hinged frames:



GMRS-24-3-LAF-06
Hinge frame size 24

Inserts fixed pole:



GMRF-250-10-108PZC-24
Fixed pole insert 24 poles, pin, 250V, 10A



GMRF-250-10-108SZC-24
Fixed pole insert 108 poles, socket, 250V, 10A



GMRF-500-16-24PEC-24
Fixed pole insert 24 poles, pin, 500V, 16A



GMRF-500-16-24SEC-24
Fixed pole insert 24 poles, socket, 500V, 16A



GMRF-500-16-46PEC-24
Fixed pole insert 46 poles, pin, 500V, 16A



GMRF-500-16-46SEC-24
Fixed pole insert 46 poles, socket, 500V, 16A



GMRF-500-16-64PEC-24
Fixed pole insert 64 poles, pin, 500V, 16A



GMRF-500-16-64SEC-24
Fixed pole insert 64 poles, socket, 500V, 16A