



Hood size 24 B


2 x M20 thread, top entry

Item number: GMRH-24BS-H-TEH-2M20

Packing unit: 1

Technical characteristics

| | |
|-----------------------------|---|
| Shell material: | Aluminium die-cast |
| Surface treatment: | Powder-coated |
| Surface colour: | RAL 9005 (jet black) |
| Locking mode: | Screw locking |
| Operation temperature: | -40°C - +125°C |
| Material sealing ring: | Nitrile Butadiene Rubber (NBR) |
| Number of slots: | 6 modules |
| Top entry horizontal (TEH): | 2 x M20 |
| Cable strain relief: | Cable gland |
| REACH compliant: | SVHC substances, yes - Lead |
| ROHS compliant: | Compliant acc. to 2015/863/EU (RoHS II), Annex II |

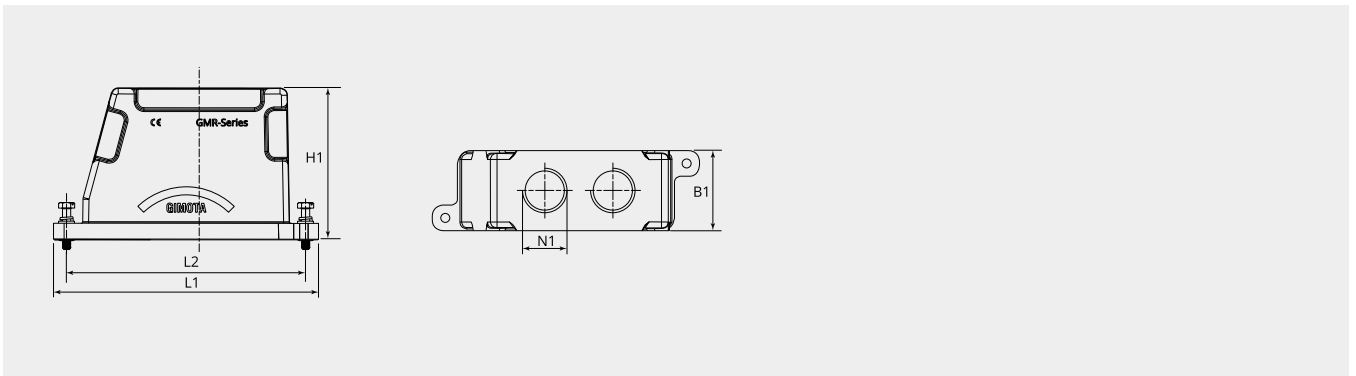

Dimensional drawing

| | |
|----------|-----------|
| B1 (mm): | 58.0 |
| d1 (Ø): | M20 x 1.5 |
| H1 (mm): | 110.0 |
| L1 (mm): | 192.0 |
| L2 (mm): | 173.0 |
| N1: | M20x1.5 |



Complementary products:

Counterpart:



GMRH-24BS-BK-IF

Bulkhead mounted housing, size 24 B

Hinged frames:



GMRS-24-3-UAF-06

Hinge frame size 24

Inserts fixed pole:



GMRF-250-10-108PZC-24

Fixed pole insert 24 poles, pin, 250V, 10A



GMRF-250-10-108SZC-24

Fixed pole insert 108 poles, socket, 250V, 10A



GMRF-500-16-24PEC-24

Fixed pole insert 24 poles, pin, 500V, 16A



GMRF-500-16-24SEC-24

Fixed pole insert 24 poles, socket, 500V, 16A



GMRF-500-16-46PEC-24

Fixed pole insert 46 poles, pin, 500V, 16A



GMRF-500-16-46SEC-24

Fixed pole insert 46 poles, socket, 500V, 16A



GMRF-500-16-64PEC-24

Fixed pole insert 64 poles, pin, 500V, 16A



GMRF-500-16-64SEC-24

Fixed pole insert 64 poles, socket, 500V, 16A

Cable glands:



2900.M20N

MAXIbrass® 2900 series - M20x1.5