



Module 1 pole, socket, 1000V, 200A

Number of slots: 2

Item number: GMRM-1000-200-1SHC-02


Packing unit: 1

Technical characteristics

Number of slots:	2
Number of contacts:	1
Contact type:	Socket
Number of mating cycles (min.):	500
REACH compliant:	SVHC substances, no
ROHS compliant:	Compliant

Thermal properties

Material contact insert:	Polycarbonate (PC)
Operating temperature:	-40°C - +125°C
Fire protection class UL94:	V0
Fire protection class DIN EN 45545-2:	R22/HL1,HL2 R23,24/HL1,HL2,HL3

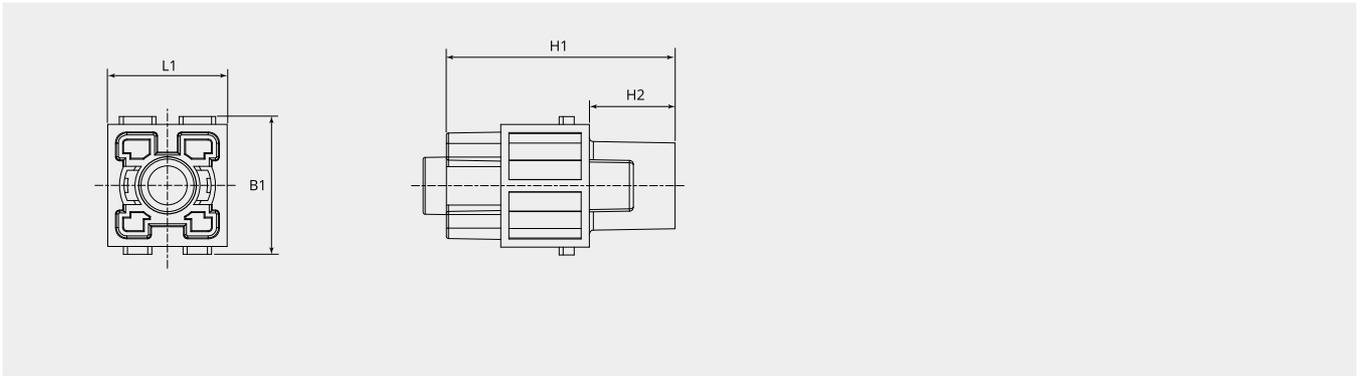

Dimensional drawing

B1 (mm):	34.2
H1 (mm):	61.7
H2 (mm):	24.7
L1 (mm):	29.4

Electrical properties

Rated current (A):	200
Operating voltage (V):	1000
Rated voltage acc. to UL/CSA (V):	600
Rated impulse voltage (kV):	8
Insulation resistance (Ω):	$\geq 10^{10}$
Pollution degree:	3



Complementary products:

Counterpart:



GMRM-1000-200-1PHC-02
Module 1 pole, pin, 1000V, 200A

Contacts:



GMRC-SHC-25AG
Socket contact HC series, 200A, 25mm²



GMRC-SHC-35AG
Socket contact HC series, 200A, 35mm²



GMRC-SHC-50AG
Socket contact HC series, 200A, 50mm²



GMRC-SHC-70AG
Socket contact HC series, 200A, 70mm²