



Module 6 pole, pin, 830V, 16A

Number of slots: 1

Item number: GMRM-830-16-6PEC-01

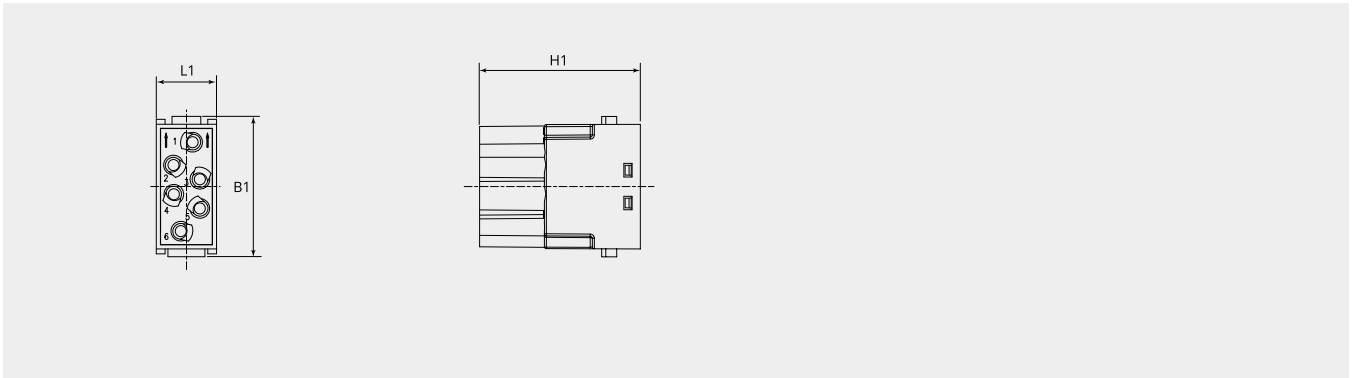
Packing unit: 1

Technical characteristics

Number of slots:	1
Number of contacts:	6
Contact type:	Pin
Number of mating cycles (min.):	500
REACH compliant:	SVHC substances, no
ROHS compliant:	Compliant

Thermal properties

Material contact insert:	Polycarbonate (PC)
Operating temperature:	-40°C - +125°C
Fire protection class UL94:	V0
Fire protection class DIN EN 45545-2:	R22/HL1,HL2 R23,24/HL1,HL2,HL3



Dimensional drawing

B1 (mm):	34.2
H1 (mm):	39.4
L1 (mm):	14.6

Electrical properties

Rated current (A):	16
Operating voltage (V):	830
Rated voltage acc. to UL/CSA (V):	600
Rated impulse voltage (kV):	8
Insulation resistance (Ω):	$\geq 10^{10}$
Pollution degree:	3




Complementary products:

Counterpart:


**GMRM-830-16-6SEC-01**

Module 6 pole, socket, 830V, 16A


Contacts:

**GMRC-PEC-0.50AU**

Pin contact EC series, 16A, 0.5mm²

**GMRC-PEC-0.75AU**


Pin contact EC series, 16A, 0.75mm²

**GMRC-PEC-1.0AU**


Pin contact EC series, 16A, 1.0mm²

**GMRC-PEC-1.5AU**


Pin contact EC series, 16A, 1.5mm²

**GMRC-PEC-2.5AU**

Pin contact EC series, 16A, 2.5mm²

**GMRC-PEC-3.0AU**

Pin contact EC series, 16A, 3.0mm²

**GMRC-PEC-4.0AU**

Pin contact EC series, 16A, 4.0mm²