

Module 5 pole, pin, 400V, 16A, spring terminal



Number of slots: 1

Item number: GMRM-400-16-5P-S-01

Net weight: 0.0164 kg


Packing unit: 1

Technical characteristics

Number of slots:	1
Number of contacts:	5
Contact type:	Pin
Number of mating cycles (min.):	500
REACH compliant:	SVHC substances, no
ROHS compliant:	Compliant

Thermal properties

Material contact insert:	Polycarbonate (PC)
Operating temperature:	-40°C - +125°C
Fire protection class UL94:	V0
Fire protection class DIN EN 45545-2:	R22/HL1,HL2 R23,24/HL1,HL2,HL3

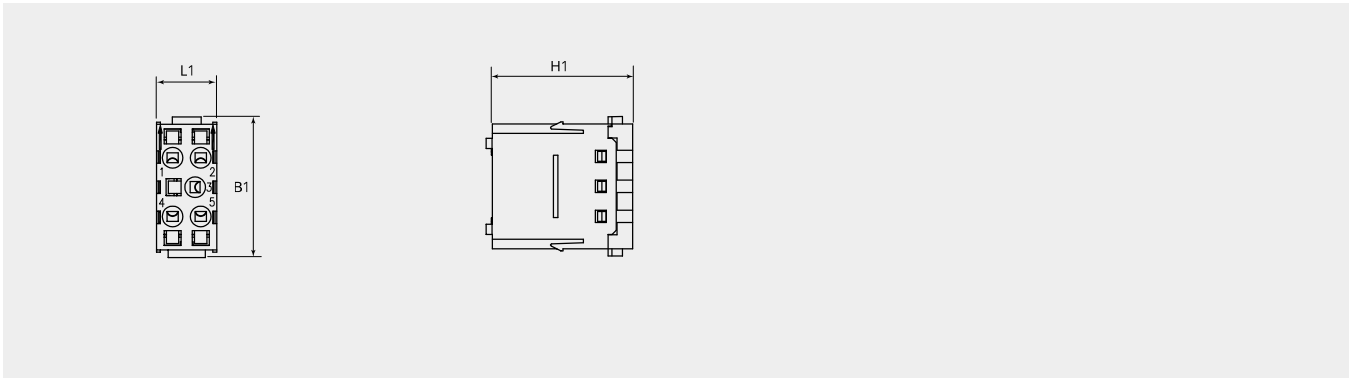

Dimensional drawing

B1 (mm):	34.0
H1 (mm):	34.2
L1 (mm):	14.6

Electrical properties

Rated current (A):	16
Operating voltage (V):	400
Rated impulse voltage (kV):	6
Insulation resistance (Ω):	$\geq 10^{10}$
Pollution degree:	3

Contact properties

Contact Material:	CU alloy
Wire section (mm²):	0.14-2.5
Wire section (AWG):	26-14
Strand/wire adaptation:	Spring connection

