

Module 8 pole, socket, 400V, 16A, spring terminal



Number of slots: 1

Item number: GMRM-400-16-5S-S-01

Net weight: 0.0159 kg


Packing unit: 1

Technical characteristics

| | |
|---------------------------------|---------------------|
| Number of slots: | 1 |
| Number of contacts: | 5 |
| Contact type: | Socket |
| Number of mating cycles (min.): | 500 |
| REACH compliant: | SVHC substances, no |
| ROHS compliant: | Compliant |

Thermal properties

| | |
|---------------------------------------|-----------------------------------|
| Material contact insert: | Polycarbonate (PC) |
| Operating temperature: | -40°C - +125°C |
| Fire protection class UL94: | V0 |
| Fire protection class DIN EN 45545-2: | R22/HL1,HL2 R23,24/HL1,HL2,HL3 |

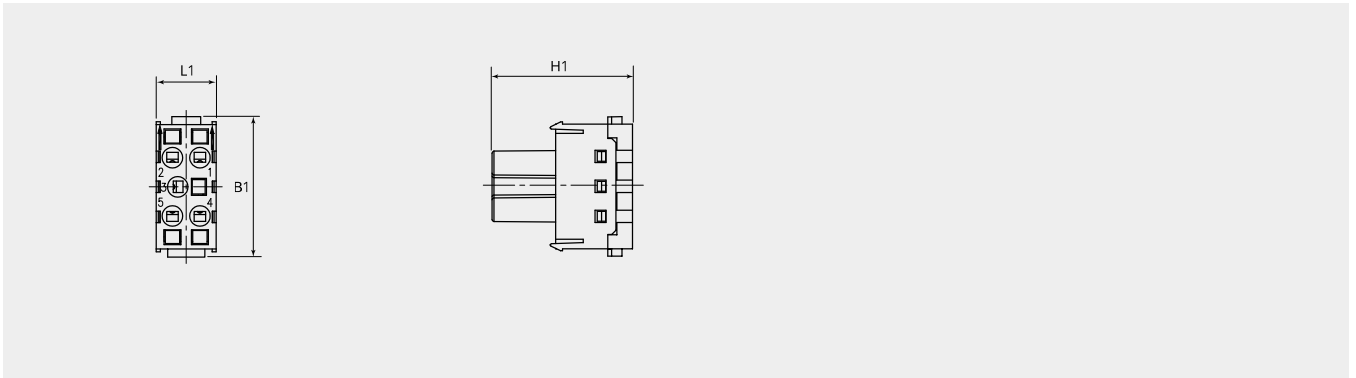

Dimensional drawing

| | |
|-----------------|------|
| B1 (mm): | 34.0 |
| H1 (mm): | 34.2 |
| L1 (mm): | 14.6 |

Electrical properties

| | |
|---|----------------|
| Rated current (A): | 16 |
| Operating voltage (V): | 400 |
| Rated impulse voltage (kV): | 6 |
| Insulation resistance (Ω): | $\geq 10^{10}$ |
| Pollution degree: | 3 |

Contact properties

| | |
|---------------------------------------|-------------------|
| Contact Material: | CU alloy |
| Wire section (mm²): | 0.14-2.5 |
| Wire section (AWG): | 26-14 |
| Strand/wire adaptation: | Spring connection |

